
MEGGITT

DATA SHEET

Vibro-Meter®

VM600 MPC4 machinery protection card

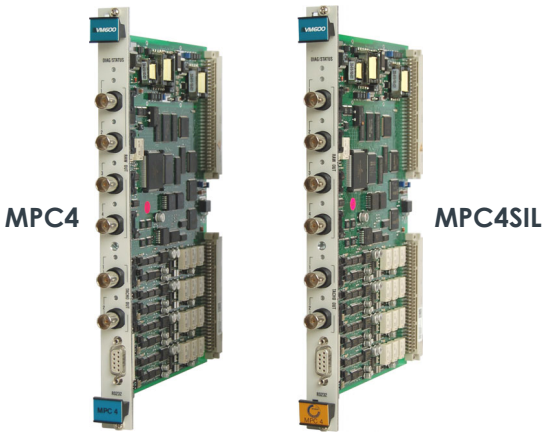

KEY FEATURES AND BENEFITS

- From the Vibro-Meter® product line
- Continuously online machinery protection card
- Real-time measurement and monitoring using state-of-the-art DSP techniques
- 4 dynamic signal channels and 2 tachometer (speed) channels, all individually programmable
- Programmable broad-band and narrow-band filters
- Simultaneous amplitude and phase monitoring in order-tracking mode
- Programmable Alert, Danger and OK set points
- Adaptive Alert and Danger levels
- Front-panel BNC connectors for easy analysis of buffered "raw" sensor signals
- Front-panel LEDs indicate status and alarms

KEY BENEFITS AND FEATURES *(continued)*

- Integrated power supplies for sensors and signal conditioners such as IEPE accelerometers and proximity measurement systems
- Live insertion and removal of cards (hot-swappable)
- Available in "standard", "separate circuits" and "safety" (SIL) versions

APPLICATIONS

- Machinery protection and/or basic condition monitoring

Information contained in this document may be subject to export control regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant export control regulations. ECN N/A.

Meggitt SA, Rte de Moncor 4, PO Box 1616, CH-1701 Fribourg, Switzerland

Tel: +41 26 407 11 11
Fax: +41 26 407 13 01
energy@ch.meggitt.com
www.meggittsensing.com/energy
www.meggitt.com

DESCRIPTION

MPC4 card

The MPC4 machinery protection card is the central element in the VM600 series machinery protection system (MPS), from Meggitt's Vibro-Meter® product line. This very versatile card is capable of measuring and monitoring up to four dynamic signal inputs and up to two speed inputs simultaneously.

The dynamic signal inputs are fully programmable and can accept signals representing acceleration, velocity and displacement (proximity), among others. On-board multi-channel processing allows measurement of various physical parameters, including relative and absolute vibration, S_{max}, eccentricity, thrust position, absolute and differential housing expansion, displacement and dynamic pressure.

Digital processing includes digital filtering, integration or differentiation (if required), rectification (RMS, mean value, true peak or true peak-to-peak), order tracking (amplitude and phase) and measurement of the sensor-target gap.

The speed (tachometer) inputs accept signals from a variety of speed sensors, including systems based on proximity probes, magnetic pulse pick-up sensors or TTL signals. Fractional tachometer ratios are also supported.

The configuration can be expressed in metric or imperial units. Alert and Danger set points are fully programmable, as are alarm time delay, hysteresis and latching. The Alert and Danger levels can also be adapted as a function of the speed or any external information.

A digital output is available internally (on the corresponding IOC4T input/output card) for each alarm level. These alarm signals can drive four local relays on the IOC4T card and/or can be routed using the VM600 rack's Raw bus or Open Collector (OC) bus to drive relays on optional relay cards such as the RLC16 or IRC4.

The processed dynamic (vibration) signals and speed signals are available at the rear of the rack (on the front panel of the IOC4T) as analog output signals. Voltage-based (0 to 10 V) and current-based (4 to 20 mA) signals are provided.

The MPC4 performs a self-test and diagnostic routine on power-up. In addition, the card's built-in "OK system" continuously monitors the level of signals provided by a measurement chain (sensor and/or signal conditioner) and indicates any problem due to a broken transmission line, faulty sensor or signal conditioner.

An LED indicator on the MPC4 front panel indicates whether a processing or hardware error has occurred. Six additional LEDs (one per input channel) indicate whether the OK System has detected a fault and whether an alarm has occurred on the channel.

The MPC4 card is available in three versions: a "standard" version, a "separate circuits" version and a "safety" (SIL) version, all of which function as a card pair using a corresponding IOC4T input/output card.

Different versions of the MPC4 card

The MPC4 card is available in different versions, including "standard", "separate circuits" and "safety" (SIL) versions. In addition, some versions are available with a conformal coating applied to the circuitry of the card for additional environmental protection against chemicals, dust, moisture and temperature extremes.

Both the 'standard' version and the "safety" (SIL) versions of the MPC4 card are certified to IEC 61508 and ISO 13849, for use in functional safety contexts, such as SIL 1 in accordance with IEC 61508 and PL c in accordance with ISO 13849-1.

The "standard" MPC4 card is the original version and supports all features and processing modes. The "standard" MPC4 is intended for safety systems using a VM600 rack with a limited range of cards, that is, "standard" MPC4/IOC4T card pairs and RLC16 relay cards. It has a VME-compatible slave interface so it is software configurable via VME when there is a CPUx card acting as a rack controller in the VM600 rack. It is also software configurable via RS-232 (on the front panel of the card).

DESCRIPTION *(continued)*

The "safety" (SIL) MPC4 card, known as the MPC4SIL, was developed to permit a wider range of installation options. Specifically, VM600 racks that also contain condition monitoring cards such as the XMx16 and relay cards such as the IRC4. To safety certify these configurations, it was necessary to ensure that the MPC4SIL is isolated from the other cards in a VM600 rack, so that there is no possibility of its configuration being inadvertently modified.

Therefore, the MPC4SIL card does not include a VME-compatible slave interface, does not support the tachometer (speed) channels and does not provide all of the signal processing capabilities of the "standard" MPC4 card (see **Additional specifications – for "standard" and "separate circuits" MPC4 cards only on page 9**).

Segregation of MPS and CMS

The VM600 rack, machinery protection cards, condition monitoring cards and associated software are designed for compliance with the machinery protection system (MPS) and condition monitoring system (CMS) segregation requirements of the API 670 standard, which ensures that the functionality of the MPS does not depend on and is not compromised in any way by the operation of the CMS.

So although machinery protection cards and condition monitoring cards can easily share sensor signals from measurement chains, MPC4/IOC4T card pairs do not share any communication buses with XMx16/XIO16T condition monitoring card pairs in a VM600 rack, and MPC4/IOC4T card pairs are configured and operated using the VM600 MPSx software (while XMx16/XIO16T card pairs are configured and operated using the VibroSight® software).

Applications information

When used as a card pair with an IOC4T input/output card, the MPC4 is highly suitable for machinery monitoring and protection in a wide range of industrial applications.

For further information on the use of MPC4/IOC4T card pairs in general, refer to the *VM600 machinery protection system (MPS) hardware manual* and the *VM600 MPSx software manuals*. For information on the use of MPC4/IOC4T card pairs in functional safety contexts, refer to the refer to the *VM600 functional safety manual*.

For specific applications, contact your local Meggitt representative.

SPECIFICATIONS – COMMON TO ALL MPC4 CARDS *(continued)*

Communications

VME bus	: A24/D16 slave mode
RS-232 port	: Configuration and communications port, proprietary protocol (see **Connectors on page 8**)
MPC4 to IOC4T bus	: Similar to industry pack (IP)

Note: The VME bus provides access to the MPC4/IOC4T card pair via a CPUx card, in order to support Ethernet and/or fieldbus communications. The RS-232 port (front-panel serial interface) provides access to the MPC4/IOC4T card pair for standalone operation, that is, when a CPUx card is not installed in the VM600 rack. An MPC4/IOC4T card pair is software configurable via VME or RS-232 (see **Configuration on page 7)**.

Note: The "standard" and "separate circuits" versions of the MPC4 card include a VME bus but the "safety" version of the card (MPC4SIL) does not. Therefore, the "standard" and "separate circuits" versions of the MPC4 card are software configurable via RS-232 or VME but the MPC4SIL card is software configurable via RS-232 only.

Configuration

MPC4/IOC4T card pair	: Software configurable via an RS-232 or Ethernet connection, using a computer running the VM600 MPSx software. Hardware configurable using jumpers on the MPC4/IOC4T card pair.

Note: Configuration via an Ethernet connection requires a CPUx card acting as a rack controller in the VM600 rack.

Status indicators (LEDs)

DIAG/STATUS	: One multicolour (green/yellow/red) LED used to indicate the status of the MPC4/IOC4T card pair, such as normal operation, configuration status or internal hardware or firmware failures
RAW OUT 1 to 4	: Four multicolour (green/yellow/red) LED used to indicate the status of the individual dynamic channels
TACHO OUT 1 to 2	: Two multicolour (green/yellow) LED used to indicate the status of the individual tachometer (speed) channels

Power supply to card (input)

Power source	: VM600 rack power supply
Supply voltages	: +5 V_{DC} and ±12 V_{DC}
Consumption from +5 V_{DC} supply	: 12.5 W typ., plus an additional 1 W per sensor used
Consumption from ±12 V_{DC} supply	: 2.5 W max.

Power supply to sensors (output)

Voltage power supply	: +27.2 V ±5% in the range 0 to 25 mA. −27.2 V ±5% in the range 0 to 25 mA. +15.0 V ±5% in the range 0 to 25 mA.
Current power supply	: 6.16 mA ±5% in the range 1 to 23 V
Over-current protection (on-board)	: 11.0 A on +5 V line

SPECIFICATIONS – COMMON TO ALL MPC4 CARDS *(continued)*

Connectors

RAW OUT 1	: BNC connector (female). Buffered "raw" sensor output (analog signal) for dynamic measurement channel 1.
RAW OUT 2	: BNC connector (female). Buffered "raw" sensor output (analog signal) for dynamic measurement channel 2.
RAW OUT 3	: BNC connector (female). Buffered "raw" sensor output (analog signal) for dynamic measurement channel 3.
RAW OUT 4	: BNC connector (female). Buffered "raw" sensor output (analog signal) for dynamic measurement channel 4.
TACHO OUT 1	: BNC connector (female). Buffered "raw" sensor output (digital signal) for tachometer (speed) channel 1.
TACHO OUT 2	: BNC connector (female). Buffered "raw" sensor output (digital signal) for tachometer (speed) channel 2.
RS232	: 9-pin D-sub connector (DCE), female. Serial connection for communication between the MPC4/IOC4T card pair and a computer running the VM600 MPSx software. Note: The RS232 connector allows a connection to a host computer using a standard serial cable.

Physical

Height	: 6U (262 mm, 10.3 in)
Width	: 20 mm (0.8 in)
Depth	: 187 mm (7.4 in)
Weight	: 0.40 kg (0.88 lb) approx.

ORDERING INFORMATION

To order please specify

Type	Designation	Ordering number (PNR)
MPC4	Different versions of the VM600 machinery protection card:	
	– Standard	200-510-SSS-1Hh
	– Separate circuits	200-510-SSS-2Hh
	– SIL safety (MPC4SIL)	200-510-SSS-3Hh

Notes
Versions of the MPC4 card are available with a conformal coating ("varnish") applied to the circuitry of the card for additional environmental protection against chemicals, dust, moisture and temperature extremes.

In 2017, the MPC4 / IOC4T machinery protection card pairs were improved to (1) be RoHS compliant and (2) provide a reduced buffered dynamic signal output impedance, which required a redesign of the underlying buffered "raw" dynamic signal output circuitry. Accordingly, the different versions of the MPC4/IOC4T machinery protection card pairs in use are:

- Later versions of the MPC4 (PNRs 200-510-SSS-115, 200-510-SSS-214 and 200-510-SSS-313 or later) and IOC4T (PNR 200-560-000-114 and 200-560-000-212 or later), which are RoHS compliant and have an output impedance of 50 Ω.
- Earlier versions of the IOC4T (PNRs 200-510-SSS-114, 200-510-SSS-213 and 200-510-SSS-312 or earlier) and IOC4T (PNR 200-560-000-113 and 200-560-000-211 or earlier), which are not RoHS compliant and have an output impedance of 2000 Ω.

"SSS" represents the firmware (embedded software) version and "Hh" the hardware version. "H" increments are for major modifications that can affect product interchangeability. "h" increments are for minor modifications that have no effect on interchangeability.

RELATED PRODUCTS

ABE04x	VM600 system racks	: Refer to corresponding data sheet
ABE056	VM600 slimline rack	: Refer to corresponding data sheet
AMC8 and IOC8T	VM600 analog monitoring card pair	: Refer to corresponding data sheet
CPUM and IOCN	VM600 modular CPU card and input/output card. Note: With a front-panel display and support for Modbus RTU/TCP or PROFINET.	: Refer to corresponding data sheet
CPUR and IOCR	VM600 rack controller and communications interface card pair. Note: With rack controller redundancy and support for Modbus RTU/TCP.	: Refer to corresponding data sheet
CPUR2 and IOCR2	VM600 rack controller and communications interface card pair. Note: With mathematical processing of fieldbus data and support for Modbus TCP and PROFIBUS.	: Refer to corresponding data sheet
IOC4T	VM600 input/output card (for the MPC4)	: Refer to corresponding data sheets
IRC4	VM600 intelligent relay card	: Refer to corresponding data sheet
MPC4G2 and IOC4G2	VM600 machinery protection card pair	: Refer to corresponding data sheet
RLC16	VM600 relay card	: Refer to corresponding data sheet
RLC16G2	VM600 relay card	: Refer to corresponding data sheet
XMx16 and XIO16T	VM600 condition monitoring card pairs	: Refer to corresponding data sheet

Meggitt (Meggitt PLC) is a leading international engineering company, headquartered in England, that designs and delivers high-performance components and subsystems for aerospace, defence and selected energy markets. Meggitt comprises four customer-aligned divisions: Airframe Systems, Engine Systems, Energy & Equipment and Services & Support.

The Energy & Equipment division includes the Energy Sensing and Controls product group that specialises in sensing and monitoring solutions for a broad range of energy infrastructure, and control valves for industrial gas turbines, primarily for the Power Generation, Oil & Gas and Services markets. Energy & Equipment is headquartered in Switzerland (Meggitt SA) and incorporates the Vibro-Meter® product line, which has over 65 years of sensor and systems expertise and is trusted by original equipment manufacturers (OEMs) globally.

All information in this document, such as descriptions, specifications, drawings, recommendations and other statements, is believed to be reliable and is stated in good faith as being approximately correct, but is not binding on Meggitt (Meggitt SA) unless expressly agreed in writing. Before acquiring and/or using this product, you must evaluate it and determine if it is suitable for your intended application. You should also check our website at www.meggittsensing.com/energy for any updates to data sheets, certificates, product drawings, user manuals, service bulletins and/or other instructions affecting the product.

Unless otherwise expressly agreed in writing with Meggitt SA, you assume all risks and liability associated with use of the product. Any recommendations and advice given without charge, whilst given in good faith, are not binding on Meggitt SA. Meggitt (Meggitt SA) takes no responsibility for any statements related to the product which are not contained in a current Meggitt SA publication, nor for any statements contained in extracts, summaries, translations or any other documents not authored and produced by Meggitt SA.

The certifications and warranties applicable to the products supplied by Meggitt SA are valid only for new products purchased directly from Meggitt SA or from an authorised distributor of Meggitt SA.

In this publication, a dot (.) is used as the decimal separator and thousands are separated by thin spaces. Example: 12345.67890.

Copyright© 2019 Meggitt SA. All rights reserved. The information contained in this document is subject to change without prior notice.

Sales offices

Meggitt has offices in more than 30 countries. For a complete list, please visit our website.

Local representative

Head office

Meggitt SA
Rte de Moncor 4
PO Box 1616
CH-1701 Fribourg
Switzerland

Tel: +41 26 407 11 11
Fax: +41 26 407 13 01
energy@ch.meggitt.com
www.meggittsensing.com/energy
www.meggitt.com